

Introduction

Offering for sale.

1200HP Diesel Electric cantilever triple Drilling Rig regularly utilized and ready to work. All components are Canadian & North American stringent regulatory agency compliant, cold weather ready with recent boiler recertification, plumbed for steam & electric heat.

- Major component loads (Excluding pipe tubs & spare parts loads) = @ 20 depending on move parameters @45 total location move loads
- BOP Stack & Pipe Tubas negotiable
- Rig Managers accommodations included
- EXI 600 hp Tesco Top Drive included
- Tongs, Slips, Elevators, Bails & Handling tools negotiable

Location: Grande Prairie, Ab, Canada



Equipment summary:

Diesel Electric cantilever triple built in 2007. Depth rating 5000 m
 Box on Box sub structure, AER Class 4 or 5 BOP
 Forum™ hydraulic cat walk system. Rigmaster™
 E90 DC powered drawworks
 10 line blocks strung to Tesco 350 ton Top Drive
 Dual mud tanks c/w dual shale shakers, integral hard top roof system & mixing shack.
 2- 1300 HP triplex slush pumps DC powered
 Dog house/water tank combination c/w tool shed
 Change shack & accumulator building
 #1, #2 & #3 Cummins powered DC gen sets
 Power house SCR control building
 2 pump houses, Boiler housed in Generator building end
 EXI 600 hp Tesco Top Drive



MAST TYPE: High Kelly Beam Leg Cantilever Triple
STATIC HOOK LOAD: 315,000 daN w/ 12 Lines
RACKING CAPACITY: 5000 m wth 4-1/2" Drill Pipe



Drilling Rig Sale Portfolio



SUBSTRUCTURE TYPE: Box on Box
ROTARY CAPACITY: 311,375 daN (350 ton)
SETBACK CAPACITY: 311,375 daN (350 ton)
CLEAR HEIGHT: 20'
FEATURES: Moves without Cranes



Support complex configuration
 Forum™ Hydraulic catwalk



ELECTRICAL POWER GENERATION
QUANTITY: 3
GENERATOR DRIVE: Cummins KTA 38-A
GENERATOR TYPE: Stamford
GENERATOR SIZE: 928 kW
 SCR unit



HOISTING AND ROTATING EQUIPMENT
TOP DRIVE: Tesco EXI 600 HP
TOP DRIVE CAPACITY: 311,375 daN (350 ton)
TRAVELLING BLOCK: 5 x 42" 311,375 daN (350 ton)
BLOCK CAPACITY: 311,375 daN (350 ton)
ROTARY TABLE: ZP – 275 (National)
PIPE SPINNER: Spinner Hawk Model 950 (Optional)



DRAWWORKS
TYPE: Rigmaster™ E90DC
CAPACITY: 90,000 Lbs Single Line Pull
POWER: 1200 hp
AUXILIARY BRAKE: Eaton WC 1150 (Double 36")
DRIVE: Yonge YZ-208X2



MUD TANK

CAPACITY: 187 m3 (1187 bbls)

TRIP TANK VOLUME: 3.12 m3

AGITATORS: 6

CENTRIFUGAL PUMPS: 3 – 6" x 5" x 11"

SHALE SHAKER: 2-Brandt King Cobra

FEATURES: Integral Lift roof w / tarps



MUD PUMPS

QUANTITY: 2


TYPE: CSF-1300 (5000 PSI circulating system)

POWER: 960 kW (1300 hp)

STROKE: 305 mm (12 in)

DRIVE: Yonge YZ-208X2



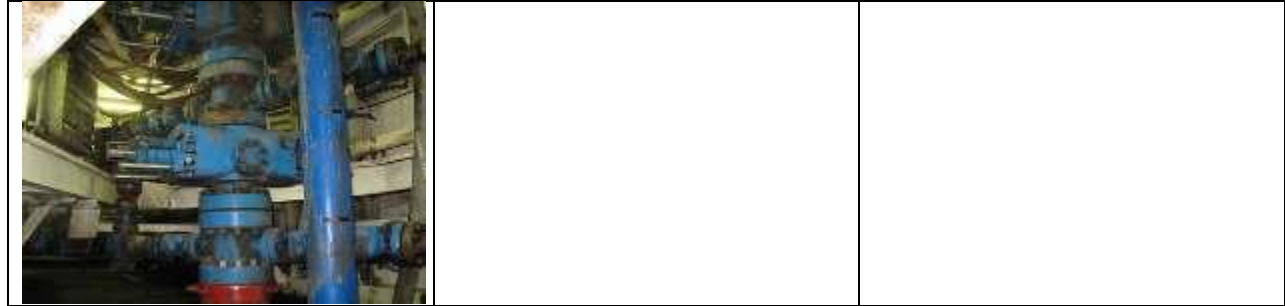

WELL CONTROL SYSTEM
Configuration: Annular Preventor, double gate & single rams, twin choke & Kill lines
BOP STACK DIAMATER: 280mm (11") (Optional)
BOP RATING: 35,000 kPa (5000 psi)
BOP TRIM TYPE: NACE
BOP TYPE: Shaffer
CHOKE MANIFOLD: Double wing 3 1/8" 35 mPa (5000 psi) Remote choke compatible
ACCUMULATOR: Dong Su, 7 station (Critical Sour compliant)
ACCUMULATOR VOL.: 680 liters (180 Gal.)
DEGASSER: Dual Poor-boy degassers & tank



Auxiliary Equipment:
Rig Manager accommodation (Skid Load)
Tool shack
Change shack SCR unit combination house
Regent 125 HP Boiler
Misc sub containers
Flare line rack

